

MG TAFTEX®

IN-100

TAFTEX® IN-100 is a vapour control and waterproof membrane composed of two layers of polypropylene. TAFTEX® IN-100 is used to prevent moist air from penetrating the insulation layers of the wall and roof construction from the inside. This prevents condensation and ultimately mold from forming in the insulation.

Application

TAFTEX® IN-100 is used on the warm side as a vapour control membrane in wall and roof constructions. Due to its constant vapour controlling property, TAFTEX® IN-100 is suitable in constructions of buildings belonging to climate class 2 and 3, such as homes, offices, schools, etc. TAFTEX® IN-100 protects the construction against moisture and provides optimal airtight insulation.

Benefits

- ✓ Waterproof
- ✓ High tensile strength and elongation at break
- ✓ Air-tight
- ✓ Processing faster than a folded membrane

Description	Width	Length	Article no.	EAN code	Quantity	Weight
TAFTEX® IN-100	1,50 m	50 m	1115010000	8719128000138	42 roll / pallet	8 kg
TAFTEX® IN-100 (with integrated adhesive strip)	1,50 m	30 m	1115010001	8719128000565	42 roll / pallet	5 kg



Wall



Roof



Floor



Waterproof



Vapour control

Specifications

Water vapour transmission 0,6 g / m² / day	Temperature resistance - 20 °C / 80 °C
Weight 100 gr / m²	Water vapour resistance Sd < 19 m
Nail tear resistance initial (length) 160 N	Water tightness W1
Nail tear resistance initial (cross) 160 N	Fire class F
Tensile strength initial (length) 180 N / 50 mm	Elongation at break (length) 80 %
Tensile strength initial (cross) 180 N / 50 mm	Elongation at break (cross) 80 %



MG TAFTEX®

IN-100

Installation

Apply TAFTEX® IN-100 on the warm side of the wall and roof construction. Attach the membrane to the underlying structure using staples. The logo should be legible from the inside. Maintain 100 mm at horizontal and vertical overlaps. For optimal vapour control, we recommend taping staples, seams and overlaps with TAFTEX® membrane tape. Seal penetrations and connections wind and watertight with VASTR® Butyl tape or Tyvek® FlexWrap tape.



Related products

MG TAFTEX®

Membrane tape



Tyvek®

FlexWrap tape




MG VASTR®

Butyl tape



MG VASTR®

Total tape



Description

TAFTEX® Membrane tape

Tyvek® FlexWrap tape

VASTR® Butyl tape

VASTR® Total tape (black)

VASTR® Total tape (black)

VASTR® Total tape (white)

Width

50 mm

60 mm

30 mm

60 mm

100 mm

60 mm

Length

25 m

10 m

20 m

25 m

25 m

25 m

Article no.

1500502500

8106001000

8103002000

8106002502

8110002501

8106002501

EAN code

8719128000183

5450208029771

8714672005233

8714672000474

8714672000481

8714672999884

Quantity

10 roll / box


3 roll / box

8 roll / box

10 roll / box

6 roll / box

10 roll / box

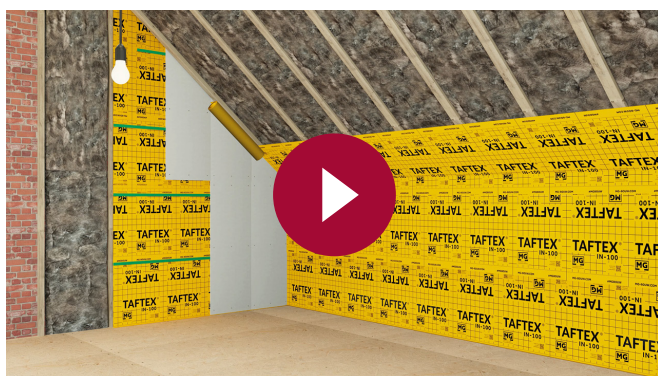

INSTALLATION VIDEO

Not quite sure yet how best to apply TAFTEX® IN-100? Scan the QR code and watch our installation videos..



All our products are intended exclusively as building or construction materials. Therefore, the user of our products is expected to be familiar with the basic principles of building physics, the regionally applicable building standards and the official national building regulations. Meuwissen Gerritsen B.V. and/or our employees are not liable for any damage resulting from (careless or incorrect) use of our products.



MEUWISSEN GERRITSEN

INFO@MG-BOUW.COM

023 - 303 28 08

MG-BOUW.COM