


Tyvek® FACADE TAPE

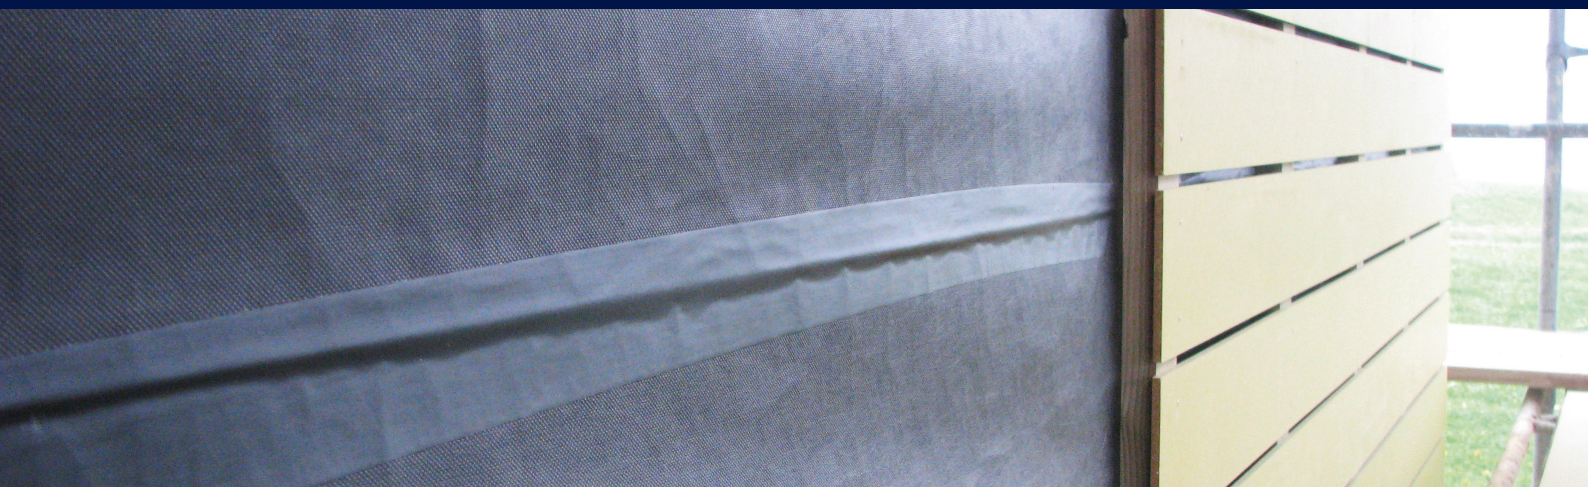

Tyvek® Facade tape features a modified water-based acrylic adhesive and a siliconized paper release liner. Tyvek® Facade tape has excellent resistance to time, water, moisture, the weather elements and chemicals. Tyvek® Facade tape was developed specifically for the Tyvek® UV-Facade membrane.

Application

Tyvek® Facade tape should be applied for wind and watertight sealing of the UV-resistant membrane Tyvek® UV-Facade in facade or roof structures. Both the durable repair of damage, wind and watertight sealing of overlap seams, and the connection of Tyvek® UV-Facade to structures should be processed with Tyvek® Facade tape. Tyvek® Facade tape can be adhered directly to wood or steel substrates.

Installation

Tyvek® Facade tape must be applied to a dust and grease free, dry surface to ensure proper adhesion. Before applying Tyvek® Facade tape, remove the release liner and apply the tape to the center of the seam / overlap. Press and rub the tape well to eliminate air bubbles and provide optimum permanent adhesion.

Description Tyvek® Facade tape	Size 75 mm x 25 m	Quantity 8 roll / box	Article no. 8107502503	EAN code 5450208029924
--	-----------------------------	---------------------------------	----------------------------------	----------------------------------

Specifications

Color Black	Adhesion on steel 24 N / 25 mm
Material PP	
Adhesive layer Modified acrylic	Protective coating Release liner
Temperature resistance - 40 °C tot + 100 °C	Processing temperature Vanaf 0 °C
Storage Dark, dry, 10 °C to 30 °C	

