


# MG VASTR® FACADE TAPE

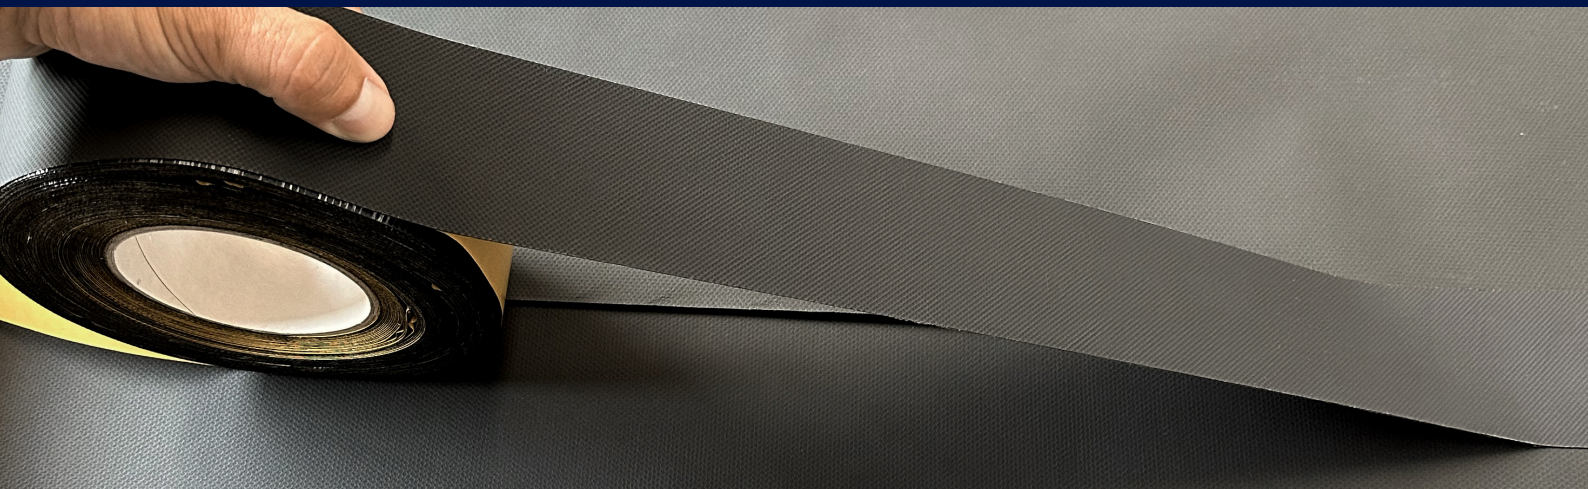

**VASTR® Facade tape features a facade membrane topcoat with a polyacrylate-based dispersion adhesive and a siliconized paper release liner. VASTR® Facade tape has excellent resistance to time, water, moisture, the weather elements and chemicals. VASTR® Facade tape is specially designed for UV Facade membrane.**

## Application

VASTR® Facade tape should be applied for wind and watertight sealing of the UV-resistant membrane in facade or roof structures. Both the durable repair of damages and overlap seams, and the connection of UV-resistant membrane to structures should be processed with VASTR® Facade tape. VASTR® Facade tape can be adhered directly to wood or steel substrates.

## Installation

VASTR® Facade tape very careful application guarantees a durable and wind- and waterproof final result. VASTR® Facade tape must be applied to a dust- and grease-free, dry substrate to ensure proper adhesion. Before applying VASTR® Facade tape, remove the release liner and apply the tape to the center of the seam and overlap. Press and rub the tape well to eliminate air bubbles and provide optimum permanent adhesion.

Description	Size	Quantity	Article no.	EAN code
VASTR® Facade tape	60 mm x 25 m	10 roll / box	8106002500	8714672999891

## Specifications

Color <b>Black</b>	Material <b>Polyester</b>
Storage <b>Dark, dry, 10 °C to 30 °C</b>	
Protective coating <b>Release liner</b>	
Adhesive layer <b>Dispersion adhesive based on polyacrylate</b>	
Temperature resistance <b>- 30 °C to + 90 °C</b>	Processing temperature <b>From 0 °C</b>

